



Data Sheet

LoPAC™ Family

PFC Mini, PFC Micro, PFC MicroS

Power Factor Corrected, AC-DC Switchers

Family Features

- Near unity power factor
- EN61000-3-2 harmonic current compliance
- Low profile package
- Output power to 1,500 W
- Up to 6 user specifiable outputs
- Universal AC input
- Power density up to 11 W/in³
- Integral cooling fans
- Autosense
- Safety agency approvals: CE Marked, cTÜVus
- Vantage Line ^[a]
- RoHS compliant

Overview

The PFC MicroS, PFC Micro and PFC Mini are members of the low profile, high-density LoPAC series of power factor corrected AC-DC power supplies. Available as a one, two or three slot package, respectively, each LoPAC slot can be configured with standard Vicor DC-DC converter modules enabling up to six user specifiable isolated outputs in a package only 1.72" (43,6 mm) high with a power density of 11 W/in³.

For maximum versatility and flexibility, the LoPAC can be configured with VI-26x (full brick), VI-J6x (half brick) or Maxi, Mini, Micro V375 Series full, half and quarter brick modules. These modules cover the entire range of outputs from 1 to 100 Vdc and 25 to 600 Watts. The optimum solution can be factory configured based on your exact voltage and power requirements.

For conducted EMI, the LoPACs meet FCC Class A and B. Certain configurations meet EN55022 Class A and B (consult factory). Harmonic current limits per EN61000-3-2 and Surge Immunity per EN61000-4-5, in addition to a wide variety of safety agency approvals, further enhance the LoPAC flexibility.

^[a] The Vantage Line is Westcor's affordable power supply option. Minor variances in some specifications between the Vantage Line and the Standard Line apply. Contact factory for more information.



PFC Mini

12.20" x 6.00" x 1.72"
309,9 x 152,4 x 43,6 mm
Up to 1,500 W
1 to 6 Outputs



PFC Micro

10.40" x 5.06" x 1.86"
264,1 x 128,5 x 47,3 mm
Up to 800 W
1 to 6 Outputs



PFC MicroS

7.95" x 5.06" x 1.86"
201,9 x 128,5 x 47,3 mm
Up to 600 W
1 to 3 Outputs

DC Output Selections

The versatility of the LoPAC series is due, in large part, to the wide array of Vicor modules available to be configured into the different package formats. Slots can be populated with VI-200, VI-J00 or Maxi, Mini, Micro modules in full, half or quarter brick sizes. Vicor's full VI-26x, VI-J6x and V375 standard product matrices are available to choose from.

In addition, the full range of non-standard voltages and powers from 1 to 100 Vdc and 10 to 600 W is also available for inclusion. The table below is just a sampling of some of the most popular standard outputs that can be configured into LoPAC slots.

Output Voltage	Available Power (W) per Package Size						
	Maxi	VI-200		Mini	VI-J00		Micro
2Vdc	160	80	60	100	40	30	50
3.3Vdc	264	132	99	150	66	50	75
5Vdc	400	200	150	200	100	75	100
12Vdc	600	200	150	300	100	75	150
15Vdc	600	200	150	300	100	75	150
24Vdc	600	200	150	300	100	75	150
28Vdc	600	200	150	300	100	75	150
48Vdc	600	200	150	300	100	75	150

LoPAC Slot Configurations

The DC-DC converter modules are used to populate each LoPAC converter slot. Each slot can be configured in different ways depending on module sizes and power limitations.

The following table summarizes the available slot configurations for each of the three LoPAC packages.

Model Type	# Slots	Maximum Output Power		Modules per Slot
		Total		
		@ 230 Vac	@ 115 Vac	
PFC Mini	3	1,500 W	800 W	1 Full or 2 Half
PFC Micro	2	800 W	500 W	1 Full or 2 Half or 3 Quarter
PFC MicroS	1	600 W	500 W	1 Full or 2 Half or 3 Quarter


Autosense Feature*

This feature is implemented in all converter slots in the LoPAC family. If remote sense connections are not needed or are inadvertently not made, no local sense connections are necessary. Simply connect the output(s) to the load and the

converter(s) will automatically operate in the local sense mode. If remote sense connections are made, the unit will operate in remote sense mode.

*Applies to converter slots utilizing Maxi or Mini size converters.

Part Numbering

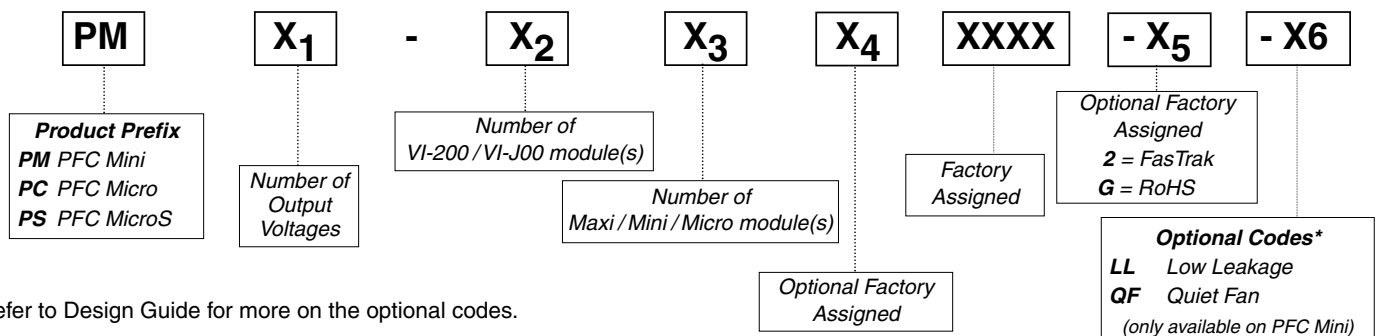

* Refer to Design Guide for more on the optional codes.

Performance Specifications

The following are typical performance specifications at room ambient temperature, nominal line voltage (115/230Vac) and 75% load on all outputs, unless specified otherwise. For detail

specifications, consult the Design Guide for the LoPAC configuration of interest. This is available on our website (vicorpower.com).

INPUT CHARACTERISTICS

Parameter	PFC Mini	PFC Micro	PFC MicroS	Units	Notes
AC Input					
Voltage		85 – 264		Vac	
Frequency (Standard)		47 – 500		Hz	
Frequency (Vantage)		47 – 63		Hz	
DC Input	100 – 380		100 – 300	Vdc	
Line Regulation		0.4		%	From low line to high line
Inrush Current					
@ 115Vac	8.5		7	A pk	
@ 230Vac	17		14	A pk	
Ride Through Time		>20		ms	
@ load	1,200		500	W	
Conducted EMI/RFI	FCC Class A EN55022 Class A		FCC Class A EN55022 Class A (<i>consult factory</i>)		Certain configurations meet FCC & EN Class B
Power Factor		>0.98			>75% load
Harmonic Current Limits		EN61000-3-2/A14			Class A
Transient Burst Immunity	EN61000-4-4		EN61000-4-4		Level 3, Performance Criteria B
Surge Immunity		EN61000-4-5			Installation Class 3, Performance Criteria B
Dielectric Withstand					
Primary to Chassis GND		2,121		Vdc	
Primary to Secondary		4,242		Vdc	
Secondary to Chassis GND		750		Vdc	

OUTPUT CHARACTERISTICS

Parameter	PFC Mini	PFC Micro	PFC MicroS	Units	Notes
Setpoint Accuracy (Standard)		1 % (Standard)	2% (Special)		% of Vnom
Setpoint Accuracy (Vantage)		2 % (Standard)	5% (Special)		
Load Regulation		0.05		%	10% to full load
		0.2		%	No load to full load
Temperature Regulation		0.005		%/°C	-20° to +65°C
Long Term Drift		0.02		%/khr	
Output Ripple & Noise					
≤10Vout		100		mV	20 MHz bandwidth
>10Vout		1.0		% Vout	20 MHz bandwidth
Voltage Trim Range					
VI-200/VI-J00 Slots		50 – 110		% Vout	±10% on 10 – 15 Vout
Maxi, Mini, Micro Slots		10 – 110		% Vout	Preload may be required
Remote Sense Compensation		0.5		Vdc	Autosense (See page 2)
OVP Set Point		125		% Vout	Not available on VI-J00 modules
Current Limit		115		% I _{max}	Auto recovery


ENVIRONMENTAL CHARACTERISTICS

Parameter	PFC Mini	PFC Micro	PFC MicroS	Units	Notes
Storage Temperature		-40 to +85		°C	
Operating Temperature					
Full Rated Power (Standard)		-20 to +45		°C	
50% Rated Power (Standard)		-20 to +65		°C	
Full Rated Power (Vantage)		0 to +45		°C	
50% Rated Power (Vantage)		0 to +65		°C	
Vibration		MIL-STD-810E, Category 10, Minimum integrity test (PFC Mini only)			
Safety Approvals		CE Marked, cTUVus			

MECHANICAL CHARACTERISTICS

Parameter	PFC Mini	PFC Micro	PFC MicroS	Units	Notes
Weight	5.5	5.2	3.1	lbs	
	2,5	2,4	1,4	kg	
Overall Dimensions	12.20 x 6.00 x 1.72	10.40 x 5.06 x 1.86	7.95 x 5.06 x 1.86	in	L x W x H
	309,9 x 152,4 x 43,6	264,1 x 128,5 x 47,3	201,9 x 128,5 x 47,3	mm	


PFC MINI

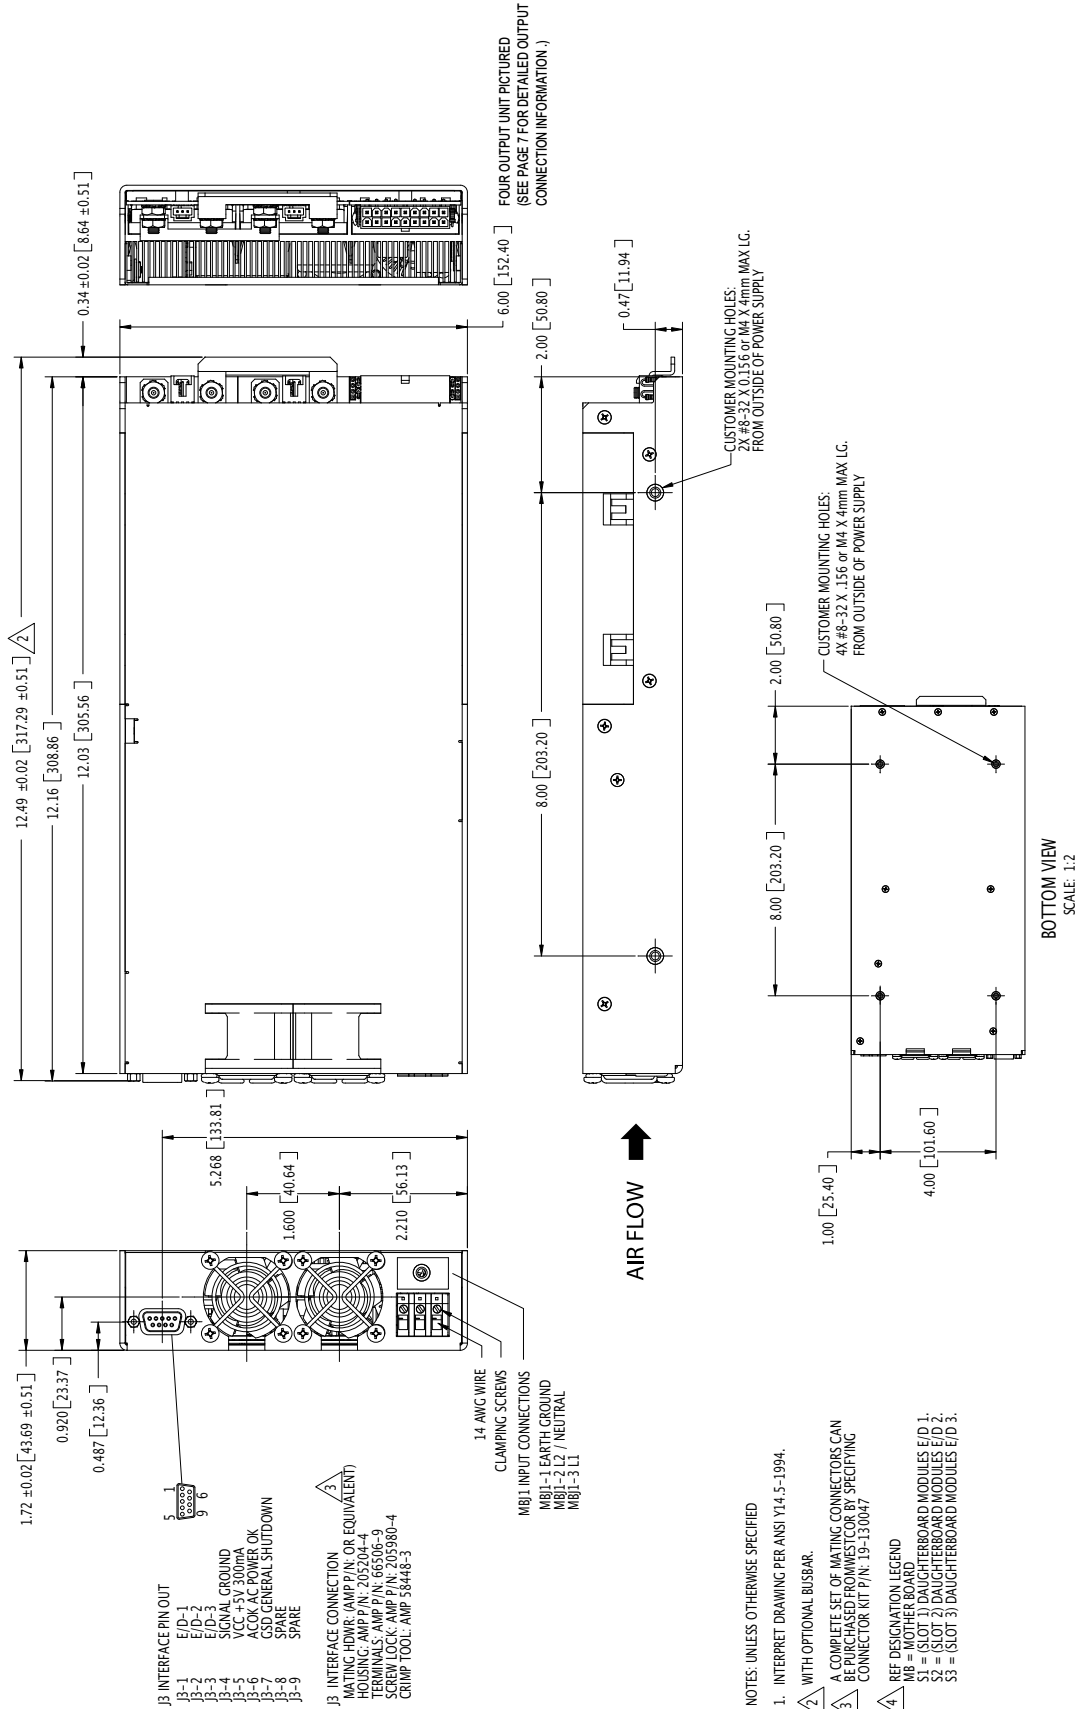

NOTES: UNLESS OTHERWISE SPECIFIED

1. INTERPRET DRAWING PER ANSI Y14.5-1994.
- ² WITH OPTIONAL BUSBAR.
3. A COMPLETE SET OF MATING CONNECTORS CAN BE PURCHASED FROM WESTCOR BY SPECIFYING CONNECTOR KIT P/N: 19-130047
- ⁴ REF DESIGNATION LEGEND
 M6 = (MOUNTING) MOUNTING HOLES
 S2 = (SLOT 2) DAUGHTERBOARD MODULES E/D 2.
 S3 = (SLOT 3) DAUGHTERBOARD MODULES E/D 3.

PFC MICRO

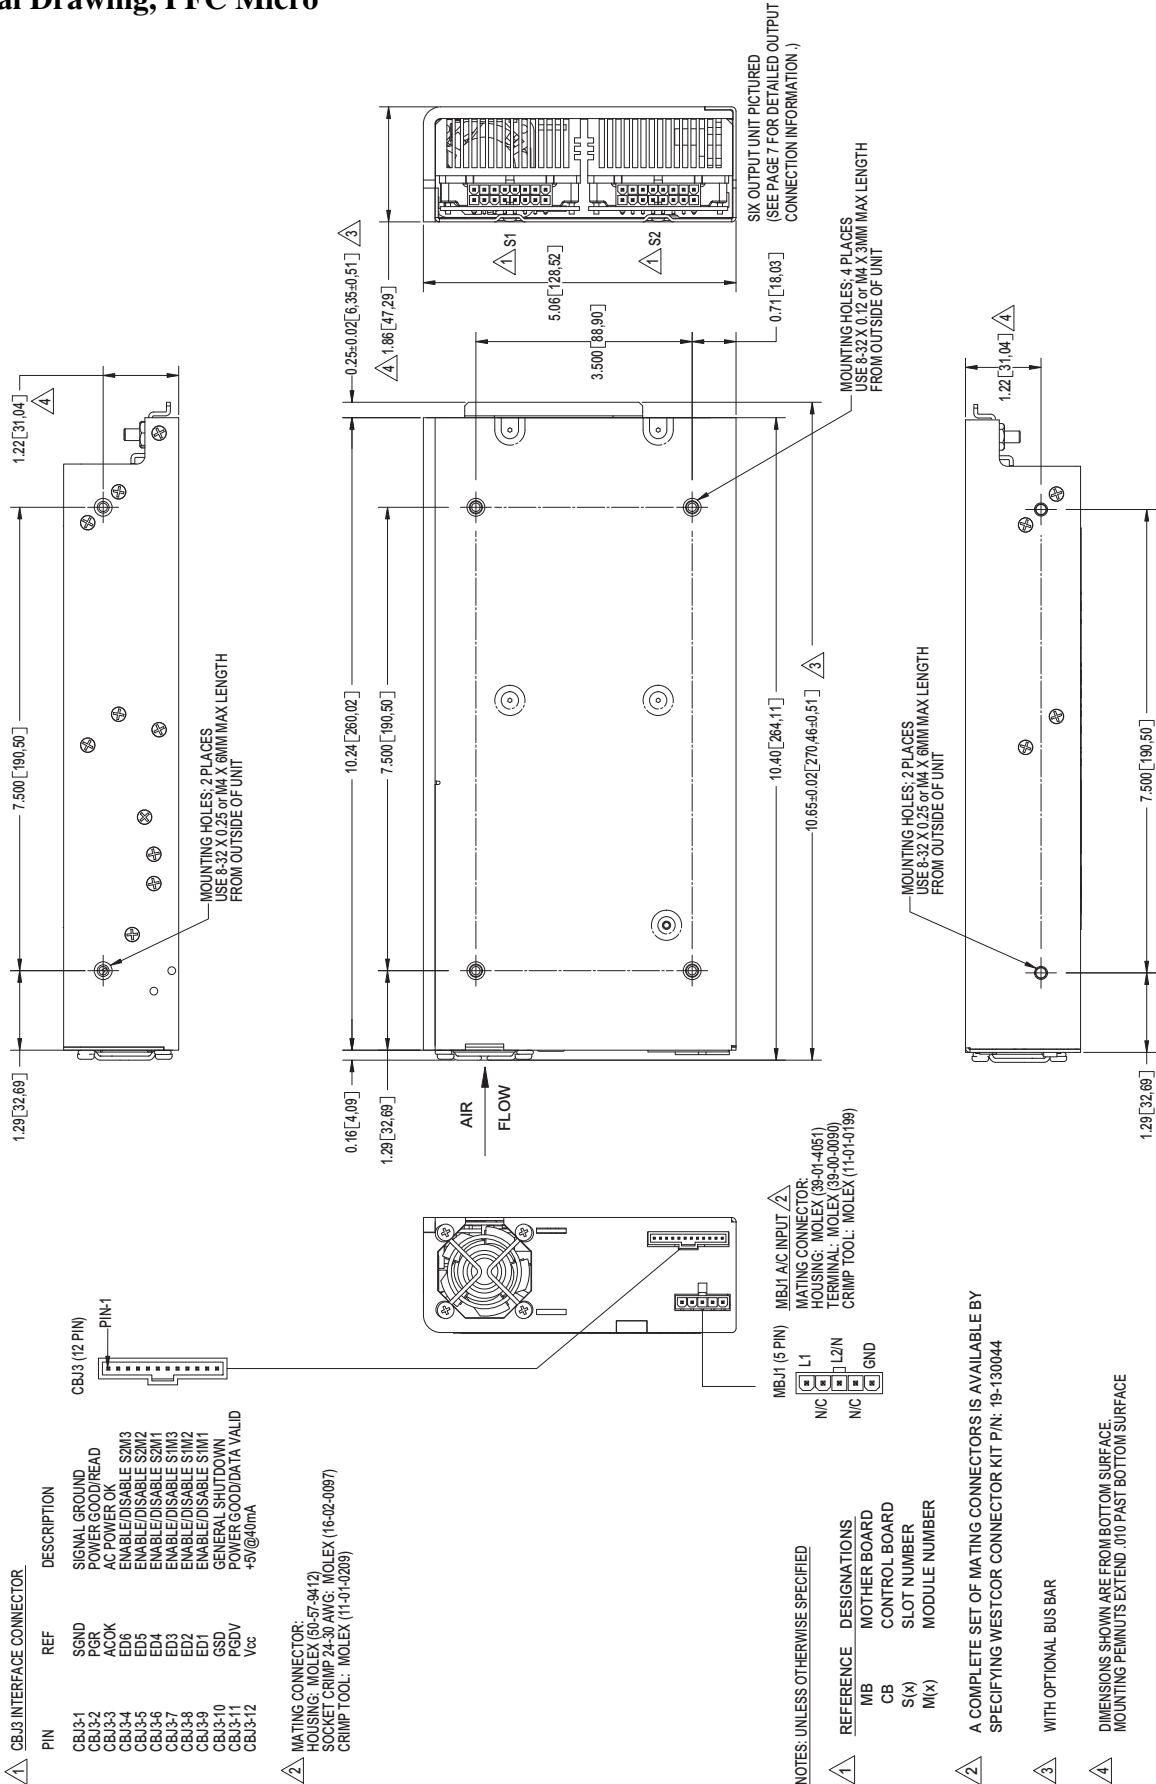

A CBJ3 INTERFACE CONNECTOR

PIN	REF	DESCRIPTION
CBJ3-1	SGND	SIGNAL GROUND
CBJ3-2	PGR	POWER GOOD/READ
CBJ3-3	ACOK	AC POWER OK
CBJ3-4	ED6	ENABLE/DISABLE SZM3
CBJ3-5	ED5	ENABLE/DISABLE SZM2
CBJ3-6	ED4	ENABLE/DISABLE SZM1
CBJ3-7	ED3	ENABLE/DISABLE SIM3
CBJ3-8	ED2	ENABLE/DISABLE SIM2
CBJ3-9	ED1	ENABLE/DISABLE SIM1
CBJ3-10	GSD	GENERAL SHUTDOWN
CBJ3-11	PGDV	POWER GOOD/DATA VALID
CBJ3-12	Vcc	+5V@40mA

B MATING CONNECTOR:
 HOUSING: MOLEX (59-57-9412)
 SOCKET CRIMP: 2A-30-AWG; MOLEX (16-02-0087)
 CRIMP TOOL: MOLEX (11-01-0209)

C MBJ1 (5 PIN)
 MATING CONNECTOR:
 HOUSING: MOLEX (39-01-4051)
 TERMINAL: MOLEX (39-00-0090)
 CRIMP TOOL: MOLEX (11-01-0198)

NOTES: UNLESS OTHERWISE SPECIFIED


- A REFERENCE DESIGNATIONS
- MB MOTHER BOARD
- CB CONTROL BOARD
- S(X) SLOT NUMBER
- M(X) MODULE NUMBER

A COMPLETE SET OF MATING CONNECTORS IS AVAILABLE BY SPECIFYING WESTCOR CONNECTOR KIT P/N: 19-130044

A WITH OPTIONAL BUS BAR

A DIMENSIONS SHOWN ARE FROM BOTTOM SURFACE. MOUNTING PEEHNUTS EXTEND .010 PAST BOTTOM SURFACE

PFC MICROS

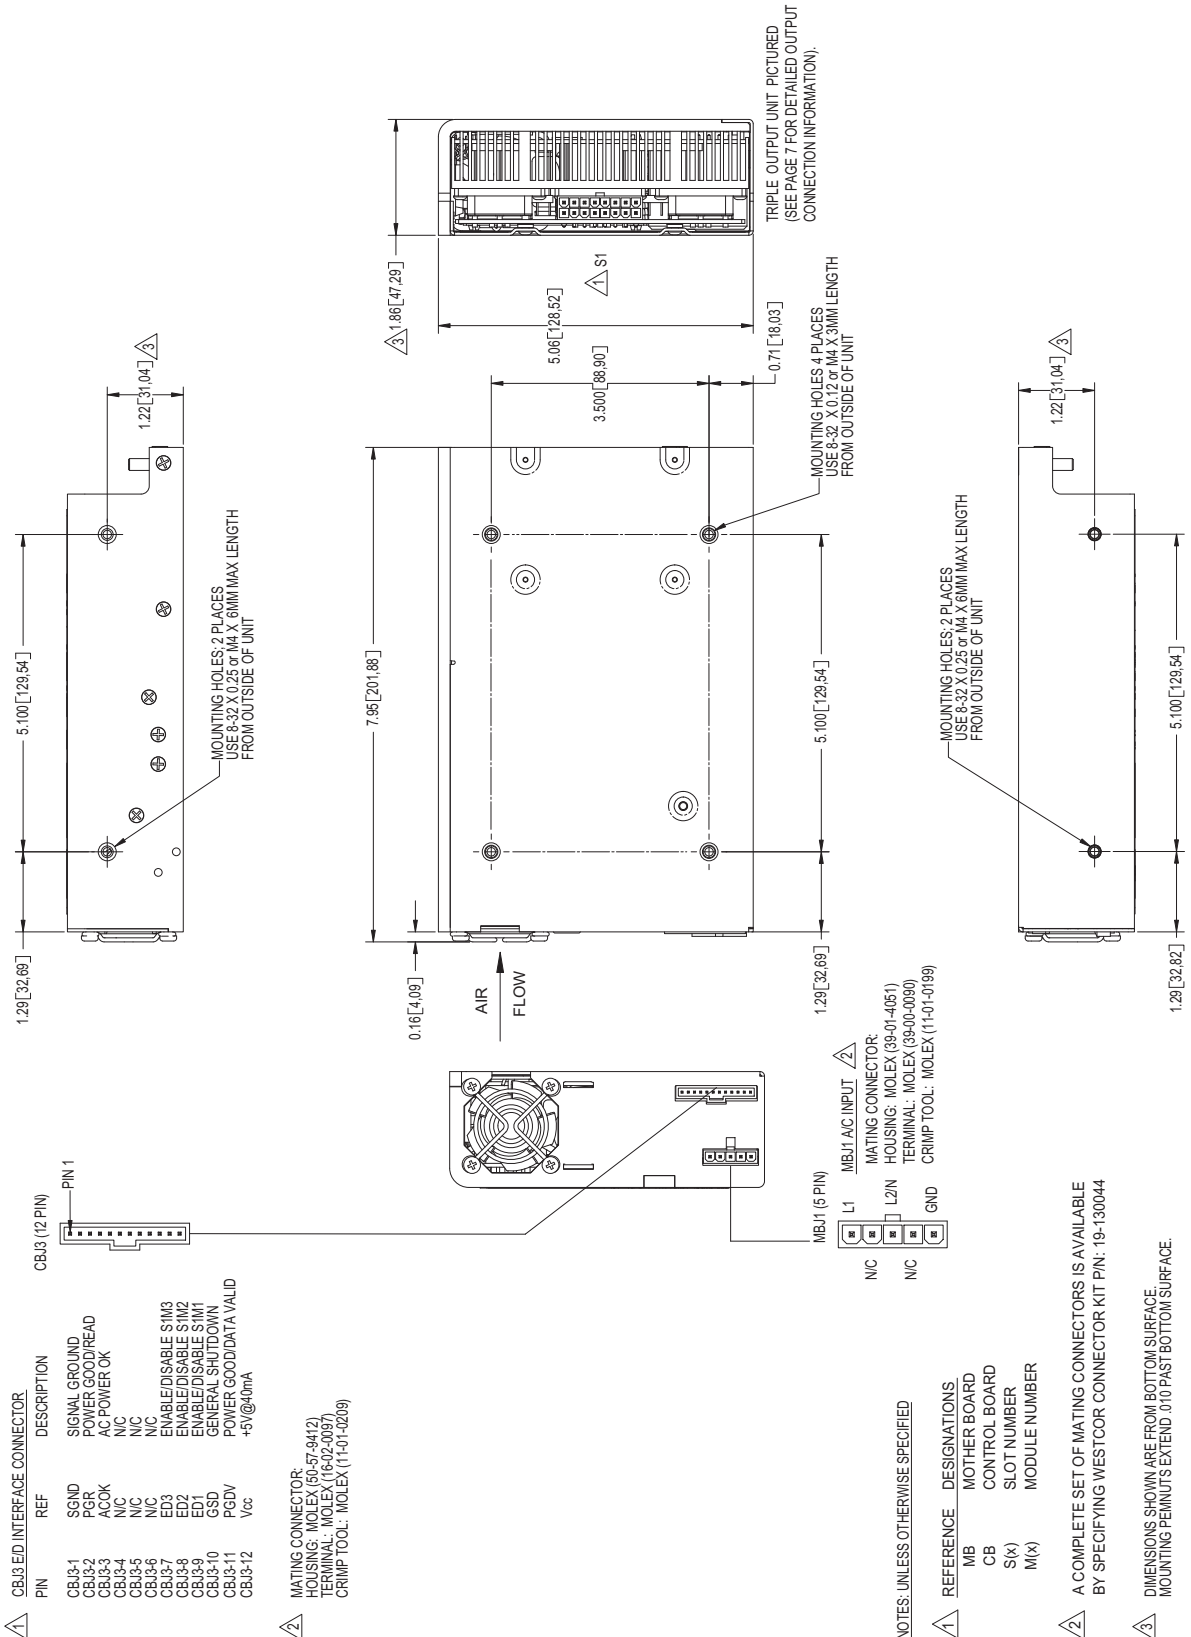


Output Connections for the PFC Mini, PFC Micro and PFC MicroS

A. OUTPUT STUDS - SINGLE OUTPUT

(when populated with Full Brick modules)

PFC Mini, PFC Micro and PFC MicroS

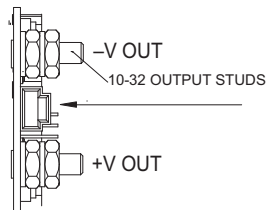

SxJ2 REMOTE SENSE/TRIM
PIN CONNECTOR

3	- REMOTE SENSE
2	+ REMOTE SENSE
1	TRIM

MATING CONNECTOR:

HOUSING: MOLEX (50-57-9403)

TERMINAL FEMALE CRIMP 22-24 AWG: MOLEX (16-02-0103)

USE CRIMP TOOL: MOLEX (11-01-0208)

B. MOLEX CONNECTOR - SINGLE OR DUAL OUTPUT

(when populated with Half Brick modules)

PFC MICRO 18 Pin Housing

SxJ1 (18 PIN OUTPUT, REMOTE SENSE
AND TRIM PIN CONNECTOR)

PIN	DESCRIPTION	PIN	DESCRIPTION
9	18	1	+V OUT M2
8	17	2	-V OUT M2
7	16	3	-V OUT M2
6	15	4	+ SENSE M2
5	14	5	- SENSE M2
4	13	6	TRIM M1
3	12	7	+V OUT M1
2	11	8	+V OUT M1
1	10	9	-V OUT M1
		10	+V OUT M2
		11	+V OUT M2
		12	-V OUT M2
		13	+ SENSE M1
		14	TRIM M2
		15	- SENSE M1
		16	+V OUT M1
		17	-V OUT M1
		18	-V OUT M1

PFC MINI 18 Pin Housing

SxJ1 (18 PIN OUTPUT, REMOTE SENSE
AND TRIM PIN CONNECTOR)

PIN	DESCRIPTION	PIN	DESCRIPTION
9	18	1	+V OUT M1
8	17	2	-V OUT M1
7	16	3	-V OUT M1
6	15	4	+ SENSE M1
5	14	5	- SENSE M1
4	13	6	TRIM M2
3	12	7	+V OUT M2
2	11	8	+V OUT M2
1	10	9	-V OUT M2
		10	+V OUT M1
		11	+V OUT M1
		12	-V OUT M1
		13	+ SENSE M2
		14	TRIM M1
		15	- SENSE M2
		16	+V OUT M2
		17	-V OUT M2
		18	-V OUT M2

*PFC MicroS dual output slot configuration uses the type A stud connection for both outputs.

3-pin connector designators are S1J1 and S1J2.

MATING CONNECTOR:

18 PIN HOUSING: MOLEX (39-01-2180)

TERMINAL FEMALE CRIMP 18-24 AWG: MOLEX 39-00-0039)

USE CRIMP TOOL: MOLEX (11-01-0197)

C. MOLEX CONNECTOR - SINGLE, DUAL OR TRIPLE OUTPUT

(when populated with Quarter Brick modules)

PFC Micro and PFC MicroS

SxJ1 (16 PIN OUTPUT, REMOTE SENSE
AND TRIM PIN CONNECTOR)

PIN	DESCRIPTION	PIN	DESCRIPTION
8	16	9	+V OUT M3
7	15	10	-V OUT M3
6	14	11	N/C
5	13	12	+V OUT M2
4	12	13	-V OUT M2
3	11	14	TRIM M1
2	10	15	+V OUT M1
1	9	16	-V OUT M1

MATING CONNECTOR:

16 PIN HOUSING: MOLEX (39-01-2160)

TERMINAL FEMALE CRIMP 18-24 AWG: MOLEX (39-00-0039)

USE CRIMP TOOL: MOLEX (11-01-0197)

The following accessories are available for the LoPAC units:

Connector Kits

A complete set of mating hardware for all combinations of input & output connections

PFC Mini	19-130047
PFC Micro & PFC MicroS	19-130044

Current Share Boards

Used for current sharing between identical LoPAC Models for increased output power or redundancy

LoPACs with VI-200/VI-J00 Modules	CSB01
LoPACs with Maxi, Mini, Micro Modules	CSB02

Vicor's comprehensive line of power solutions includes high density AC-DC and DC-DC modules and accessory components, fully configurable AC-DC and DC-DC power supplies, and complete custom power systems.

Information furnished by Vicor is believed to be accurate and reliable. However, no responsibility is assumed by Vicor for its use. Vicor components are not designed to be used in applications, such as life support systems, wherein a failure or malfunction could result in injury or death. All sales are subject to Vicor's Terms and Conditions of Sale, which are available upon request.

Specifications are subject to change without notice.

The latest data is available on the Vicor web site at vicorpower.com.

Westcor, a division of Vicor, designs and builds medium to high power configurable power supplies incorporating Vicor's high density DC-DC converters and accessory components. Westcor's product line includes:

- PFC Mini
- PFC Micro
- PFC MicroS
- Autoranging MegaPAC
- Mini MegaPAC
- PFC MegaPAC
- PFC MegaPAC (High Power)
- PFC MegaPAC-EL (Low Noise)
- 3 Phase/4kW MegaPAC
- 3 Phase/4kW MegaPAC-EL (Low Noise)
- ConverterPACs
- FlatPAC-EN

See Design Guides for detailed information about all Westcor products. They can be downloaded in PDF format from the website.



Vicor Corporation

25 Frontage Road, Andover, MA, 01810
800-735-6200, Fax: 978-475-6715

Westcor Division of Vicor

560 Oakmead Parkway, Sunnyvale, CA 94085
Tel: 408-522-5280, Fax: 408-774-5555

vicorpower.com