


PROPRIETARY DATA:
 This document and information contained
 may not be reproduced, used or disclosed
 without prior written permission of WESTCOR
 a division of VICOR Corporation.


DWG NO. 36-00030 SH 1 REV C



REVISIONS				
ECO	REV	DESCRIPTION	DATE	APPROVED
367	A	PRODUCTION RELEASE	2/3/95	RBD
421	B	NOTE 2.1 WAS: 1.1MH, IS: 1.3MH	7/18/95	RBD
549	C	CHG: NOTE 2.1, WAS: 1.3mH, IS: 0.9-2 AT 1kHz	6/5/96	RBD

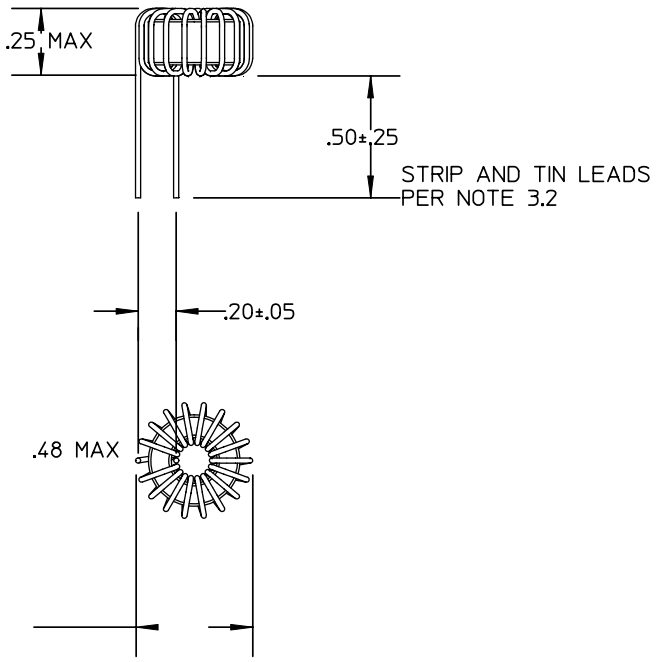

STRIP AND TIN LEADS
 PER NOTE 3.2

- NOTES: UNLESS OTHERWISE SPECIFIED,
- MATERIALS: UL RECOGNIZED 94V-2 FLAMMABILITY RATING CLASS B (130°C) REQUIRED
 1.1 CORE: TOROID - .375 X .187 X .188 ($\mu = 5000$)
 MAGNETICS: ZJ-41005-TC
 FAIR-RITE: 5975002501 (COATED)
 STEWARD: 35T0375-30P
 1.2 WIRE: U.L. RECOGNIZED 130°C RATING MAGNET WIRE
 - SPECIFICATIONS:
 2.1 L = 0.9-2mH AT 30% @ 1 KHZ. TEST FREQUENCY
 2.2 DCR = 35 mOHMS MAX
 - CONSTRUCTION:
 3.1 WIND
 3.2 TIN LEADS CLOSE TO CORE AS SHOWN
 3.3 LABEL BULK PACKAGE WITH DRAWING NUMBER AND REVISION, VENDOR IDENTIFICATION, AND DATE OF MANUFACTURE.



		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE:	CONTRACT NO.		 WESTCOR a division of  VICOR Corp.	
		FRACTIONS DECIMALS ANGLES * 1/32 .XX * .01 * 1/2° .XXX * .005	APPROVALS DATE			
		MATERIAL	DRAWN	S. KEITH	10/13/94	INDUCTOR, 1 MH TOROID SIZE B CAGE CODE DWG NO. 36-00030 REV C
SEE MIS		SEE NOTE 1	CHECKED	HONDO	01/26/95	
NEXT ASSY	USED ON	FINISH	APPROVED	RDRABING	10/13/94	
APPLICATION		DO NOT SCALE DRAWING	DESIGNED	R. DRABING	10/13/94	

