



PROPRIETARY DATA:
 This document and information contained
 may not be reproduced, used or disclosed
 without prior written permission of WESTCOR
 a division of VICOR Corporation.

DWG NO. 36-00030 SH 1 REV C

REVISIONS				
ECO	REV	DESCRIPTION	DATE	APPROVED
367	A	PRODUCTION RELEASE	2/3/95	RBD
421	B	NOTE 2.1 WAS: 1.1MH, IS: 1.3MH	7/18/95	RBD
549	C	CHG: NOTE 2.1, WAS: 1.3mH, IS: 0.9-2 AT 1kHz	6/5/96	RBD

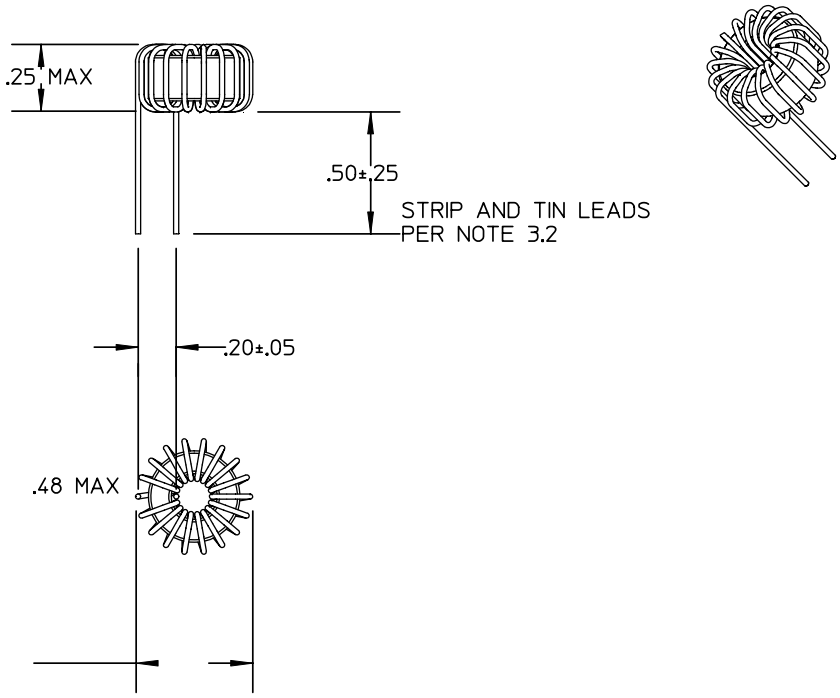

- NOTES: UNLESS OTHERWISE SPECIFIED,
- MATERIALS: UL RECOGNIZED 94V-2 FLAMMABILITY RATING CLASS B (130°C) REQUIRED
 1.1 CORE: TOROID - .375 X .187 X .188 ($\mu = 5000$)
 MAGNETICS: ZJ-41005-TC
 FAIR-RITE: 5975002501 (COATED)
 STEWARD: 35T0375-30P
 - WIRE: U.L. RECOGNIZED 130°C RATING MAGNET WIRE
 - SPECIFICATIONS:
 - L = 0.9-2mH AT 30% @ 1 KHZ. TEST FREQUENCY
 - DCR = 35 mOHMS MAX
 - CONSTRUCTION:
 - WIND
 - TIN LEADS CLOSE TO CORE AS SHOWN
 - LABEL BULK PACKAGE WITH DRAWING NUMBER AND REVISION, VENDOR IDENTIFICATION, AND DATE OF MANUFACTURE.



		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE:	CONTRACT NO.		WESTCOR a division of VICOR Corp.	
		FRACTIONS DECIMALS ANGLES * 1/32 .XX * .01 * 1/2° .XXX * .005	APPROVALS			
		MATERIAL	DRAWN	S. KEITH	10/13/94	INDUCTOR, 1 MH TOROID SIZE B CAGE CODE DWG NO. 36-00030 REV C
SEE MIS		SEE NOTE 1	CHECKED	HONDO	01/26/95	
NEXT ASSY	USED ON	FINISH	APPROVED	RDRABING	10/13/94	
APPLICATION		DO NOT SCALE DRAWING	DESIGNED	R. DRABING	10/13/94	
			SCALE	2/1	FILENAME: 360030C.DWG	SHEET 1 OF 1